



Annex-F

Loan No. and Title:	3562-PAK: Punjab Intermediate Cities Improvement Investment Program (PICIP)
Contract No. and Title:	NCB-Works/PICIP-04: Road Upgradation

Date: 24 October 2022

ADDENDUM No. 3

Subject: Amendment of Bid Document for NCB-Works/PICIP-04: Road Upgradation under Section 4 (Bill of Quantities), Section 6 (Drawings), and Section 3 (sub-clause 2.3.2)

With reference to IFB Notice dated 23 September 2022, the following amendments have been made in the respective sections of the as-issued Bidding Documents under Section 4 (Bill of Quantities), Section 6 (Drawings), and Section 3 (sub-clause 2.3.2). The addendum shall be read and construed as an integral part of the Bidding Documents and shall take precedence in case of any conflict/ambiguities in the Bidding Documents and other provisions within. The changes mentioned herein below are applicable for Contract No: NCB-Works/PICIP-04, unless indicated otherwise.


Lot-4: Construction of Flyover in Sialkot

Ch.01 Item # 01

LOCAL GOVERNMENT AND COMMUNITY DEPARTMENT GOVERNMENT OF PUNJAB
PUNJAB INTERMEDIATE CITIES IMPROVEMENT PROGRAM (PICIP)
GRADE SEPARATION AT RAILWAY CROSSING OF SHAHABPURA ROAD SIALKOT (LOT # 04)

(MRS 2nd Bi-Annual 2022) Chap#/ Item#	DESCRIPTION	Unit	Quantity	Rate (Rs.)		AMOUNT (Rs.)
				In Figure	In Words	
BILL # 1 APPROACH AND SERVICE ROAD						
Ch. 01 Item #01	Carriage of 100 Cft. (2.83 cu.m) of all materials like stone 16.4 aggregate, spawi, kankar lime (unslaked), surkhi, etc. or 150 Cft. (4.25 cu.m) of timber, by truck or by any other means owned by the contractor. (Carriage 200 Km)	100 Cft	10,410.79			
BILL # 2 CONSTRUCTION OF FLYOVER						
(A) SUB STRUCTURE						
Ch. 01 Item #01	Carriage of 100 Cft. (2.83 cu.m) of all materials like stone 16.4 aggregate, spawi, kankar lime (unslaked), surkhi, etc. or 150 Cft. (4.25 cu.m) of timber, by truck or by any other means owned by the contractor. (Carriage 200 Km)	100 Cft	2,474.66			
(B) SUPER STRUCTURE						
Ch. 01 Item #01	Carriage of 100 Cft. (2.83 cu.m) of all materials like stone 16.4 aggregate, spawi, kankar lime (unslaked), surkhi, etc. or 150 Cft. (4.25 cu.m) of timber, by truck or by any other means owned by the contractor. (Carriage 200 Km)	100 Cft	1,810.63			
BILL # 4 CONSTRUCTION OF RCC WALL						
Ch. 01 Item #01	Carriage of 100 Cft. (2.83 cu.m) of all materials like stone 16.4 aggregate, spawi, kankar lime (unslaked), surkhi, etc. or 150 Cft. (4.25 cu.m) of timber, by truck or by any other means owned by the contractor. (Carriage 200 Km)	100 Cft	468.40			

Director
Procurement & Contracts
Program Management Unit
PICIP, LG&CD Department
Govt. of the Punjab



Lot-4: Construction of Flyover in Sialkot

Bill No.01: Ch. 18 Item, 10 (iii) and Ch.18, Item 10 (iv)

LOCAL GOVERNMENT AND COMMUNITY DEPARTMENT GOVERNMENT OF PUNJAB

PUNJAB INTERMEDIATE CITIES IMPROVEMENT PROGRAMME (PCIIP)

LOT-4: CONSTRUCTION OF FLYOVER IN SIALKOT.

ENGINEER COST ESTIMATE

(MRS 2nd BI-Annual 2022) Chap# / Item#	DESCRIPTION	Unit	Quantity	Rate (Rs.)		AMOUNT (Rs.)
				In Figure	In Words	
Ch. 18 Item 10(iii)	Providing and laying plant premixed bituminous carpet. Base Course including compaction and finishing to required camber, grade and density. 4% Bitumen (Excluding carriage of crushed stone aggregate/bajri from Kirana Hill Quarry sargodha). (3" Thickness)	100Sft	2,022.69			
Ch. 18 Item 10(iv)	Providing and laying plant premixed bituminous carpet.Wearing Course including compaction and finishing to required camber, grade and density.4.5% Bitumen (Excluding carriage of crushed stone aggregate/bajri from Kirana Hill Quarry sargodha). (2" Thickness)	100Sft	2,610.75			

Lot-4: Construction of Flyover in Sialkot

Bill No 02: Ch.6 Item 25 (iii) and Ch.06 Sr.6 Item (i)


LOCAL GOVERNMENT AND COMMUNITY DEPARTMENT GOVERNMENT OF PUNJAB

PUNJAB INTERMEDIATE CITIES IMPROVEMENT PROGRAMME (PCIIP)

GRADE SEPARATION AT RAILWAY CROSSING OF SHAHABPURA ROAD SIALKOT (LOT # 04)

Item No.	DESCRIPTION	Unit	QTY	Rate (Rs.)		AMOUNT (Rs.)
				In Figure	In Words	
(A) SUB STRUCTURE						
Ch. 6 Item 25 (iii)	Lifting, transporting and placing precast prestressed concrete Beam, Girders and other members (excluding bolters) etc. in to Position on the bridge to correct alignment and level, etc. complete (ii) Beam above 75tr. (22.5m) upto 100tr. (30m) length	100Cft	845.51			
(B) SUPER STRUCTURE						
Ch. 6 Sr. 6Item (i)	Providing and laying reinforced cement concrete (including prestressed concrete), using coarse sand and screened graded and washed aggregate, in required shape and design, including forms, moulds, shuttering, lifting, compacting, curing, rendering and finishing exposed surface, complete (but excluding the cost of steel reinforcement, its fabrication 2) Plastering done under soffit of and habitation buildings shall be paid (3) Reinforced cement concrete in roof slab, beams, extra. columns lintels, girders and other structural members laid in situ or precast laid in position, or prestressed members cast in situ, complete in all respects.:- (1) Type A (nominal mix 1:1:2)	Per Cft	84,551.26			

(Signature)
**Director
 Contracts,
 Procurement & Control Unit,
 Program Management Department
 PCIIP, LG&CD Department
 Govt. of the Punjab**



Lot-4: Construction of Flyover in Sialkot

Revised Summary of Cot (Deleted Bill # 3 DRAIN WORK)

LOCAL GOVERNMENT AND COMMUNITY DEPARTMENT GOVERNMENT OF PUNJAB
 PUNJAB INTERMEDIATE CITIES IMPROVEMENT PROGRAMME (PCIIP)
 GRADE SEPARATION AT RAILWAY CROSSING OF SHAHABPURA ROAD SIALKOT
 (LOT # 04)

SUMMARY OF COST

BILL NO	DESCRIPTION	AMOUNT (RS.)
1	BILL # 1 APPROACH AND SERVICE ROAD	
2	BILL # 2 CONSTRUCTION OF FLYOVER	
3	BILL # 3 CONSTRUCTION OF RCC WALL	
4	BILL # 4 ELECTRICAL WORKS	1,834,500.000
5	BILL # 5 ROAD SIDE LANDSCAPING AND HORTICULTURAL WORK	32,565,300.00
6	ENVIRONMENTAL MANAGEMENT COST:	
7	SHIFTING OF SERVICES SESCO, SNGPL, PTCL etc. (P.S):	
Total Project Cost:		32,565,300.000

Lot-4: Construction of Flyover in Sialkot:

Bill# 4 CONSTRUCTION OF RCC WALL:

Updated Drawing No. CEC/PCIIP/SHP/STR/DR-18

RETAINING WALL REINFORCEMENT DETAIL
SCALE: 1:10

TYP. RETAINING WALL SECTION
SCALE: 1:10

NOTES:
 1. ALL REINFORCING BARS SHALL BE AS PER IS: 1786 (MS) OR IS: 1786 (HRB).
 2. THE REINFORCING BARS SHALL BE PROVIDED AS PER THE DRAWING AND SHALL BE PROVIDED AS PER THE DRAWING.
 3. ALL REINFORCING BARS SHALL BE PROVIDED AS PER THE DRAWING AND SHALL BE PROVIDED AS PER THE DRAWING.
 4. ALL REINFORCING BARS SHALL BE PROVIDED AS PER THE DRAWING AND SHALL BE PROVIDED AS PER THE DRAWING.
 5. ALL REINFORCING BARS SHALL BE PROVIDED AS PER THE DRAWING AND SHALL BE PROVIDED AS PER THE DRAWING.
 6. ALL REINFORCING BARS SHALL BE PROVIDED AS PER THE DRAWING AND SHALL BE PROVIDED AS PER THE DRAWING.
 7. ALL REINFORCING BARS SHALL BE PROVIDED AS PER THE DRAWING AND SHALL BE PROVIDED AS PER THE DRAWING.
 8. ALL REINFORCING BARS SHALL BE PROVIDED AS PER THE DRAWING AND SHALL BE PROVIDED AS PER THE DRAWING.

RETAINING WALL DIMENSIONS		RETAINING WALL REINFORCEMENT												
H	B	B1	B2	T1	T2	R1	R2	R3	R4	R5	R6	R7	R8	R9
21'-0"	17'-0"	12'-0"	4'-0"	2'-0"	1'-0"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"
19'-0"	15'-0"	9'-0"	4'-0"	1'-0"	1'-0"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"
18'-0"	14'-0"	9'-0"	3'-0"	1'-0"	1'-0"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"
16'-0"	13'-0"	8'-0"	3'-0"	1'-0"	1'-0"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"
15'-0"	12'-0"	8'-0"	2'-0"	1'-0"	1'-0"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"
8'-0"	7'-0"	4'-0"	1'-0"	1'-0"	1'-0"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"
5'-0"	4'-0"	2'-0"	1'-0"	1'-0"	1'-0"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"	0'-10"

OWNER: LOCAL GOVERNMENT AND COMMUNITY DEPARTMENT GOVERNMENT OF PUNJAB

DESIGNED BY: CIVIL ENGINEER

DRAWN BY: CIVIL ENGINEER

CHECKED BY: CIVIL ENGINEER

DATE: 2024

PROJECT: GRADE SEPARATION AT RAILWAY CROSSING OF SHAHABPURA ROAD SIALKOT

SCALE: AS SHOWN

DATE: 2024

Director
 Contracts & Management Unit,
 Procurement Management Program, LG&CD Department
 PICIIP, Govt. of the Punjab



Lot-4: Construction of Flyover in Sialkot:

Bill # 6 ROADSIDE LANDSCAPING AND HORTICULTURAL WORK:

Drawings provided as follows:

NSI-01: Providing and fixing of Stand Alone Planter including GI Pipe

NSI-03: Construction of Cast in place RCC (1:2:4) planter including


NSI-05: Providing and Fixing MS dustbins with fixing frames painted



NSI-06: Street benched of MS frames and

NSI-07: RCC (1:2:4) Concrete Circular Benches


NSI-09: Grilling and beautification Work

SCALE		1. As shown in the drawing unless otherwise specified.	
NO.	DATE	BY	FOR
1			ISSUED FOR PROJECT
2			
3			
4			
5			
6			
7			
8			
9			
10			
CLIENT: LOCAL GOVERNMENT AND COMMUNITY DEVELOPMENT (LG & CD)			
CONSULTANT: MNC CONSULTANT CREATIVE ENGINEERING CONSULTANT (CEC) SES CONSULTANT			
PROJECT: URBANABILITY DESIGN & SUPERVISION (UNDO)			
PROJECT LOCATION: AT BAHAWALPUR CROSSING OF SHARADHA ROAD			
TITLE: DUSTBIN			
DESIGNER	DATE OF DESIGN	SCALE	PROJECT NO.
CHECKED	DATE OF CHECK	SCALE	PROJECT NO.
APPROVED	DATE OF APPROVAL	SCALE	PROJECT NO.
DATE	SCALE	PROJECT NO.	



Director
 Contracts
 Program Management Unit,
 Program Management & Contract Unit,
 Program Management Unit,
 PICIP, LG&CD Department
 Govt. of the Punjab



PLAN

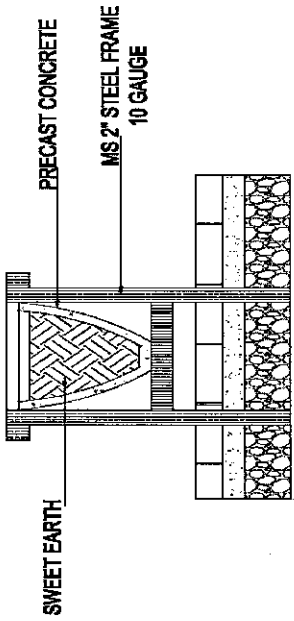



SECTION



ELEVATION

SHEET: 14-2008/AS/RAILWAY/PROJ/IND/33 CHINA ROAD PUNJAB										
C										
D										
E										
F										
G										
H										
CLIENT:			LOCAL GOVERNMENT NO COMMIT DEVELOPMENT (L&LDC)							
CONSULTANT:			UNICONSULTANT CREATIVE ENGINEERING CONSULTANCIES (CES) JES CONSULTANT							
PROJECT:			URBAN MOBILITY DESIGN & SUPERVISION (MDS) PRIORITY PROJECT GRADE SEPARATION AT RAILWAY CROSSING OF SHALUPUR ROAD							
TITLE:			BRIDGE PLANS							
NO.	REV.	DATE	BY	DESCRIPTION	SCALE	APPR.	DATE	BY	DESCRIPTION	

P
Director
Procurement & Contracts
Management Unit
Program Management
PICIP, LG&CD Department
Govt. of the Punjab

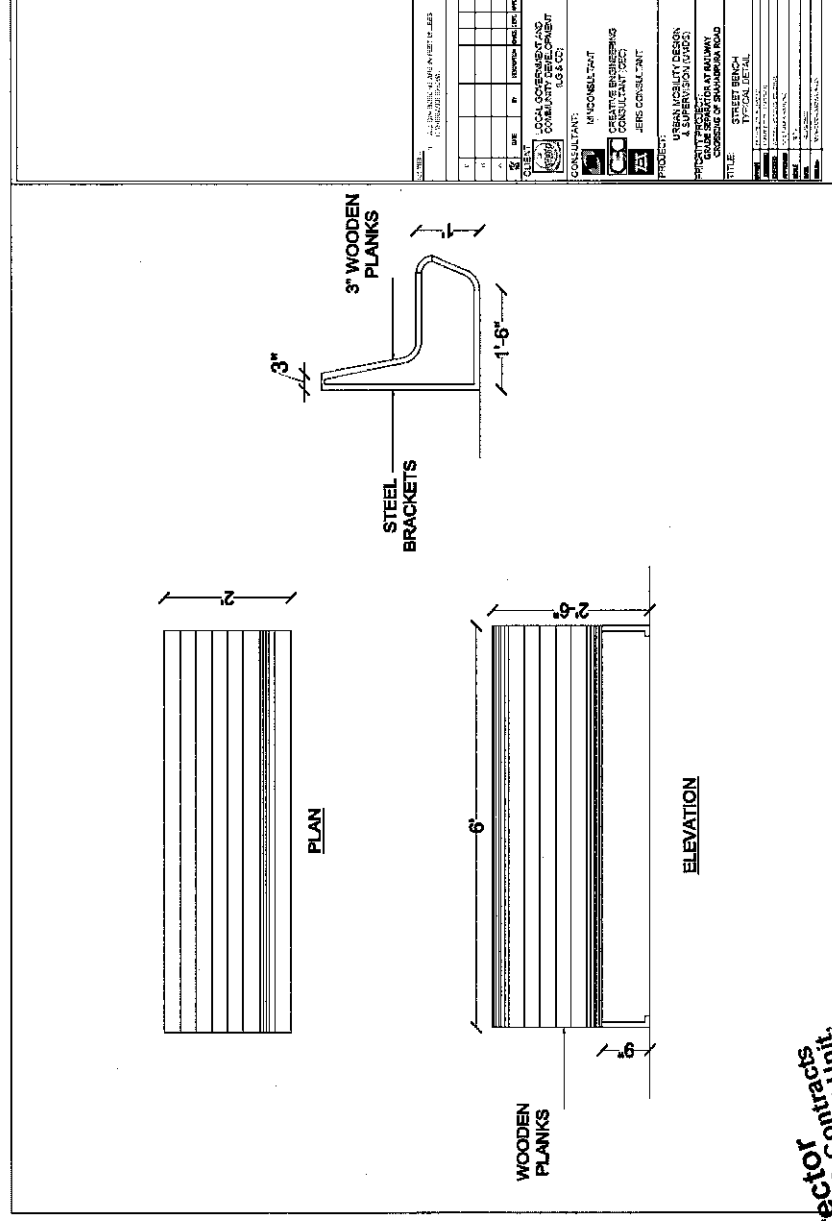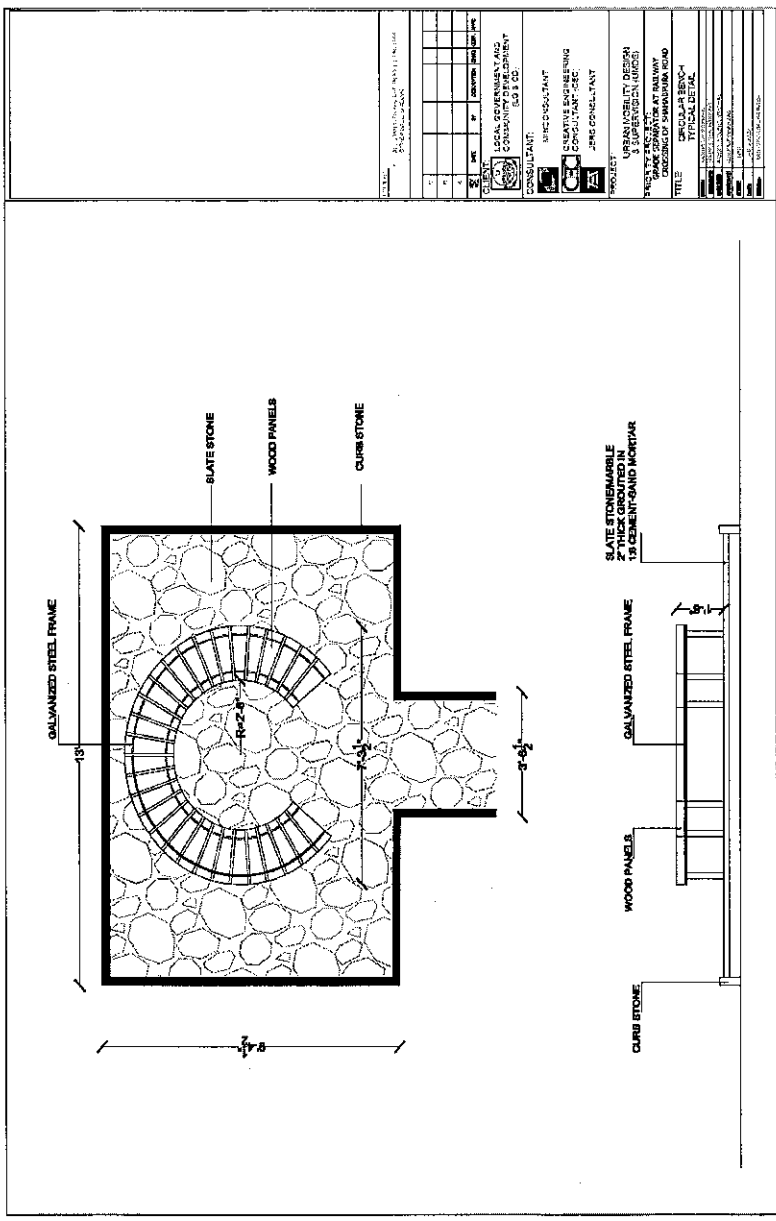


NO.	REV.	DATE	DESCRIPTION

DRAWN BY: **ABDUL KHALIQ**
 CHECKED BY: **ABDUL KHALIQ**
 PROJECT: **URBAN MOBILITY DESIGN & SUPERVISION (URDS)**
 TITLE: **STREET BENCH - CURB SIDE DETAIL**
 SHEET NO: **02** OF **02**
 SCALE: **AS SHOWN**
 DATE: **12/11/2018**

NO.	REV.	DATE	DESCRIPTION

OBJECT: **URBAN MOBILITY DESIGN & SUPERVISION (URDS)**
 CONSULTANT: **CREATIVE ENGINEERING CONSULTANTS (CEC)**
 PROJECT: **URBAN MOBILITY DESIGN & SUPERVISION (URDS)**
 TITLE: **STREET BENCH - CURB SIDE DETAIL**
 SHEET NO: **02** OF **02**
 SCALE: **AS SHOWN**
 DATE: **12/11/2018**

Director
 Program Management & Contracts
 Government of Punjab
 Program Management Unit
 Civil, L1988CCD Department
 Govt. of the Punjab



Lot-2: Improvement of Shahabpura Road Sialkot:
Bill No.01: Ch. 18 Item, 10 (iii) and Ch. 18, Item 10 (iv)

LOCAL GOVERNMENT AND COMMUNITY DEPARTMENT GOVERNMENT OF PUNJAB
 PUNJAB INTERMEDIATE CITIES IMPROVEMENT PROGRAMME (PICIP)

URBAN MOBILITY DESIGN AND SUPERVISION
 LOT-02: IMPROVEMENT OF SHAHABPURA ROAD

Sr. No	(MRS 2nd Bi-Annual 2022) Chp#/Item#	DESCRIPTION	Unit	QTY	Rate (Rs.)		AMOUNT (Rs.)
					In Figure	In Words	
BILL # 01 ROAD WORK (MRS ITEMS)							
1	Ch. 18 Item 10(iii)	Providing and laying plant premixed bituminous carpet, Base Course including compaction and finishing to required camber, grade and density. 4% Bitumen (Excluding carriage of crushed stone aggregate/bajri from Kirana Hill Quarry sargodha) . (3" Thickness)	100Sqft	10,928.78			
2	Ch. 18 Item 10(iv)	Providing and laying plant premixed bituminous carpet, Wearing Course including compaction and finishing to required camber, grade and density. 4.5% Bitumen (Excluding carriage of crushed stone aggregate/bajri from Kirana Hill Quarry sargodha) .(2" Thickness)	100Sqft	10,928.76			

Section 3: Evaluation and Qualification Criteria:

2.3.2 Average Annual Construction Turnover

Criteria	Compliance Requirements				Documents
	Requirement	Single Entity	Joint Venture		
			All Partners Combined	Each Partner	
Minimum average annual construction turnover of the amount mentioned below calculated as total certified payments received for contracts in progress or completed, within the last <u>three (03) years:</u> Lot-1: PKR 1,612 million Lot-2: PKR 1,115 million Lot-3: PKR 1,358 million Lot-4: PKR 2,046 million	must meet requirement	must meet requirement	must meet 25% of the requirement	must meet 40% of the requirement	Form FIN - 2

Director
 Program Management & Contract Unit
 Local Government Department
 Govt. of the Punjab
 P-118, LG&CD Department



This Addendum shall now serve as a mandatory part of the bidding document for the relevant sections and shall be referred to while preparing the bid.

Director Procurement & Contracts
Punjab Intermediate Cities Improvement Program (PICIIP)
Local Government & Community Development Department, Punjab

40, B-1, Gulberg III, Lahore.

Telephone: +92-042-99211074

Fax: +92-042-99211070

E-mail: pmu.piciip@punjab.gov.pk

Website: <http://piciip.gop.pk>